





**Glazed tile for wall hygiene**  
**Range COLOR**




## Assortment :

Dimensions in mm :	Color 12.5/7.5 244x119x7.5 mm	Color 12.5/10 240x115x10 mm	Color 20/6 200x200x6 mm	Color 20/7.5 200x200x7.5 mm
				
Colors:	White glossy, white matt	White glossy, white matt	White satin, (1)	White glossy, white matt, (1)

(1) Other colors available on request

## Accessories for Color 12.5/7.5:

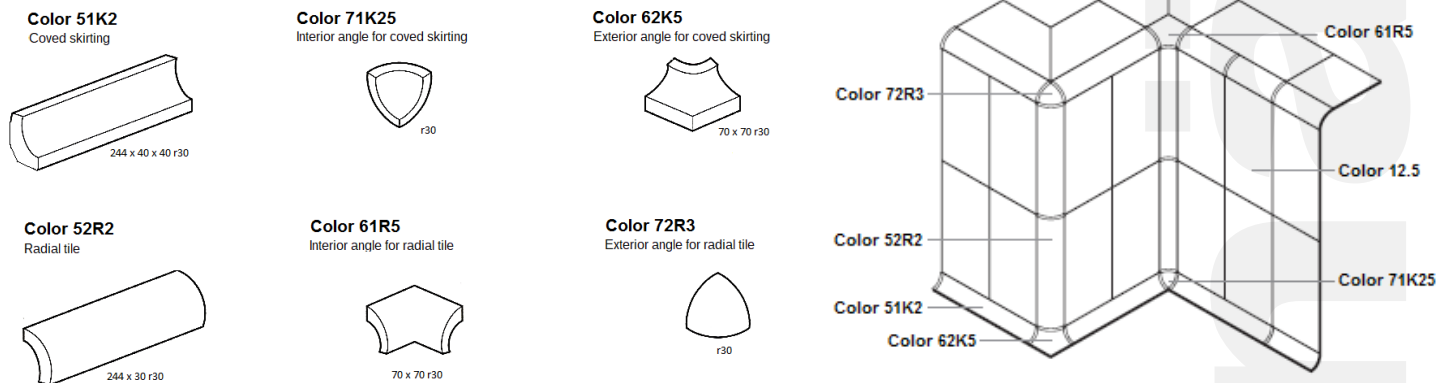

## Description of the product :

The tiles are made from selected clays that take on a white appearance when fired. This gives color 12.5/7.5, color 12.5/10 and color 20/6 tiles a low water absorption vitrified base.

## Application:

The shock resistance of color 12.5/7.5, color 12.5/10 and color 20/6 tiles makes them ideal for use in the food industry, industrial kitchens and sanitary areas. The specific properties of these three references, make this covering suitable for places exposed to severe conditions (facades, cold storage rooms for example). The tiles color 12.5/7.5, color 12.5/10, color 20/6 and color 20/7.5 are also suitable for wall coverings in private homes: kitchens, bathrooms, laundries, ... For more information, please refer to our *Floor Recommendation Guide*.

## Selection and control:

Tiles 1050 and 1850 are only delivered as first choice. The format, parallelism, flatness and straightness of the edges are subject to a strict factory control. The values determined by EN 14411 may not be exceeded. A certain tolerance is allowed for color shading. Water absorption as well as other physical and mechanical characteristics are regularly checked.

## Frost resistance:

The tiles color 12.5/7.5, color 12.5/10 and color 20/6 are frost resistant. For outdoor installation (uncovered terraces, etc.), we recommend that a drainage layer be laid. color 20/7.5 tiles are not frost resistant and should not be laid outdoors.

## Other information:

For the laying of the tiles, please refer to our technical documentations *Methods of laying*. We advise you to wet the color 20/7.5 tiles well when laying the tiles with cement glue to improve the adhesion of the tiles to the cement glue.

## Delivery:

Höganäs tiles are delivered from our warehouse in Rochetoir or by truck directly from the factory.

Technical description according to EN14411	Standards	Color 12.5/7.5 Color 12.5/10	Color 20/6	Color 20/7.5
Class	EN 14411	Alb - Extruded (0.5% < Eb < 3%)	Blb - Pressed (0.5% < Eb < 3%)	BIII- Pressed (Eb > 10%)
Water absorption	ISO 10545-3	Eb < 1.5 %	Eb ≤ 2%	18% < Eb < 20%
Modulus of rupture	ISO 10545-4	≥ 35 MPa	≥ 40 MPa	≥ 13 MPa
Frost resistance	ISO 10545-12	Warranty	Warranty	No
Resistance to acids and alkaline	ISO 10545-13	GLA / GHA	GLA / GHA	GLA
Resistance to cleaning products for home and cleaning products for swimming-pool	ISO 10545-13	GA	GA	GA

The information contained in this sheet is for information purposes only. The information provided is based on our current knowledge. It is the responsibility of the user to check that this sheet is the most recent. As we have no influence on the use of our products or the laying conditions specific to each construction site, we cannot be held responsible for the final result or any other indirect consequences.

23 impasse Gutenberg, 38110 Rochetoir France



+33 (0)4 74 83 55 90



+33 (0)4 74 97 45 08



info@hoganas-france.com



www.hoganas-France.com